


## MD-CE 360i/8 WAGO WINSTA

**Item number**      **GTIN**  
 EP10510045      4015120510045

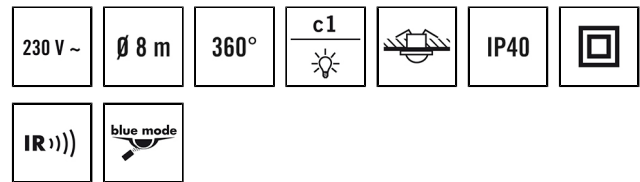

### Technical data

GENERAL	
Device category	Ceiling-mounted motion detector
Included in delivery	Includes lens mask
Product information	Please note the Explanation of circuit breaker in the download area of the product!
User interface	IR remote control with "blue mode" technology
Remote controllable	✓
Conformity	CE, EAC, RoHS, WEEE
Product-specific information	Configuration only possible via ESY-Pen, ESY-App and remote control
Warranty	5 years
ATTACHMENT	
Installation type	Recessed mounting
Installation position	Ceiling
Installation dimension	Installation depth: 67 mm, Ø 82 mm
Type of connection	Plug, Socket
Connector	WAGO WINSTA® MIDI Cod. A
Number of contacts	3
Length of cable	1.5 m
HOUSING	
Dimensions	Height/Depth 24 mm, Ø 82 mm
Weight	532 g
Material	UV-stabilised polycarbonate
Protection type	IP40
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 - 93 %, non-condensing

### Product description

- Recessed ceiling-mounted motion detector with **360° field of detection**
  - **Range of up to 8 m** across at a recommended installation height of 3 m (maximum mounting height 5 m), for use in small rooms, passageways, toilets, small offices, hallways with no or little natural lighting
  - **1.5 m pre-assembled WAGO WINSTA® inlet and outlet**
  - 16 A high-performance relay (tungsten pre-contact)
  - Default settings ensure immediate operability
- Offers special product features like:**
- Simple parameterisation, remote control and documentation with ESY-Pen and ESY-App

Colour      opal matt

ELECTRICAL VERSION	
Control system	ON/OFF
Protection class	II
Nominal voltage	230 V ~ / 50 Hz
In-rush current	800 A / 200 µs
Power consumption	0.3 W

SENSORS	
Detection angle	360°
Detection range diagonally	Ø 8 m
Detection range head-on	Ø 6 m
Field of detection	up to 50 m²
Recommended installation height	3 m
Max. mounting height	5 m
Light measurement	mixed light
Level of brightness	5–2000 lx

CHANNELS (LIGHTING / HVAC)	
Number of light channels	1
Push button input lighting	1
Push button input HVAC	–
Number of parallel switchable detectors	10
Slave input	–
Mode	Semi-automatic, Fully automatic
Switching delay from "dark to light"	0 s
Switching delay from "light to dark"	30 s
Constant light control	–

## MD-CE 360i/8 WAGO WINSTA

Item number	GTIN
EP10510045	4015120510045

Channel	C1 Lighting	600 W LED	
Function	Switching	Switch contact	make contact / non-floating
Switching capacity	230 V/50 Hz, 16 AX 2300 W/10 A (cos phi = 1) 1150 VA/5 A (cos phi = 0,5)	Push button input	✓
		Impulse mode	✓
		Switch-off delay time	60 s...30 min (adjustable in steps)


### Factory settings

GENERAL		Operating mode	fully automatic
Sensitivity	100 %	Level of brightness/switching threshold	100 lx
CHANNELS (LIGHTING / HVAC)		Switch-off delay time	5 min
Channel	C1 Lighting		


### Accessories

Product designation	Item number	Product description	GTIN
<b>Electrical accessories</b>			
FILTER 230 V	EP10426988	Filter for suppression of inductive loads, such as relays, contactors, fluorescent lamps and transformers	4015120426988
<b>Protection</b>			
BASKET GUARD ROUND SMALL	EM10425615	Basket guard for presence and motion detectors and smoke detectors, Ø 165 mm, height 70 mm	4015120425615
<b>Remote control</b>			
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	4015120425356
REMOTE CONTROL MDi/PDi	EM10425509	IR remote control for presence detectors and motion detectors	4015120425509
REMOTE CONTROL USER	EM10016011	IR remote control for end users	4015120016011

### Dimension drawing



### Field of detections




### Detection range

Diagonally (A)	Ø 8 m
Frontal (B)	Ø 6 m

## MD-CE 360i/8 WAGO WINSTA


**Item number**      **GTIN**  
 EP10510045      4015120510045

**Circuit diagram**

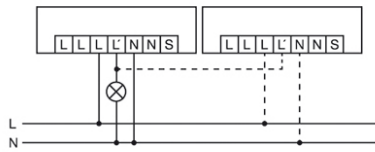


Standard operation parallel connection of max. 10 motion detectors.

**Circuit diagram**




Standard operation with additional control by means of a button.

**Circuit diagram**

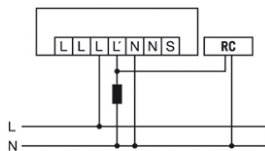

An RC filter may be required when connecting inductors (e.g. relays, contactors, ballasts).

**Circuit diagram**

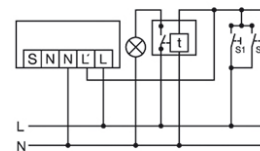

Parallel connection with automatic stairwell light.