

LED OUTDOOR LIGHTS | GB  
AL P MONZA / GARDA SERIES

**ESYLUX**•



**LED OUTDOOR LIGHTS  
AL P MONZA / GARDA SERIES**

# CLASSIC DESIGN FOR A PLEASING SHAPE TO EXTERIOR FACADES – THE LED OUTDOOR LIGHTS AL P MONZA / GARDA LED SERIES





AL P MONZA LED

AL P GARDA LED




**INSTALLATION TYPE:**  
Wall mounting

The spherical covers made of milky or bubble glass contain efficient LEDs, while an integrated motion detector provides for even more additional energy efficiency. Even the installation itself is efficient: thanks to ample wiring space and a comfortable one-hand plug base!

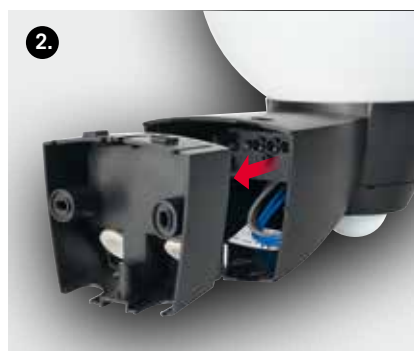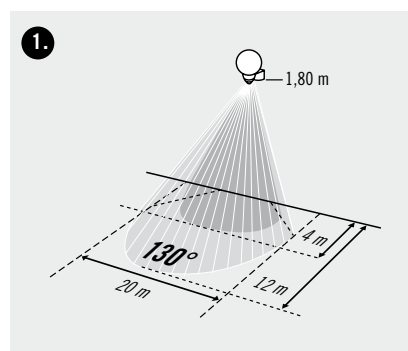

## 1.) FLEXIBLE FIELD OF DETECTION

The lights include an integrated motion detector with a 130° field of detection. As the detector lens is flexible, coverage and range can be easily adjusted to suit the on-site conditions.

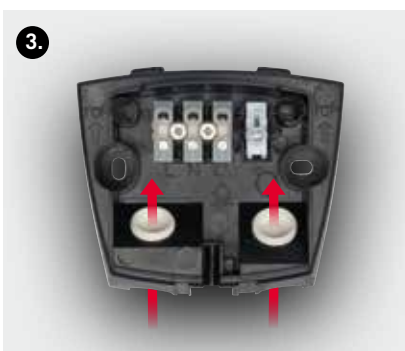

## 3.) LARGE WIRING SPACE

In the first step, only the connection plug is installed to the wall, offering ample room to comfortably wire the cable.



## 4.) ADJUSTMENT UNIT ELEGANTLY CONCEALED

The adjustment unit is elegantly concealed under the cover. The cover can be easily removed, and switch-off delay time or target light value can be adjusted simply using the potentiometers!

## 2.) CONVENIENT MOUNTING USING ONE-HAND PLUG BASE


The light holder with integrated sensor can be secured into its base with just one click. One hand always stays free — for example, to hold onto the ladder.



## TECHNICAL DATA:

	2700 K	
	6 W	6 W
<b>PRODUCT DESIGNATION</b>	<b>AL P MONZA 130 ... LED</b>	<b>AL P GARDA 130 ... LED</b>
Item no.	white, similar to RAL 9010 Black, similar to RAL 9005	
Mains voltage	230 V ~ 50 Hz	230 V ~ 50 Hz
Overvoltage protection	Category II	Category II
Rated output	6.6 W	6.6 W
Luminous flux	490 lm	400 lm
Luminous efficacy	approx. 75 lm/W	approx. 60 lm/W
Color Rendering Index CRI	> 80	> 80
LED service life @ Ta = 25°C	25,000 hrs L80B50	25,000 hrs L80B50
Permissible ambient temperature	-25°C - +55°C	-25°C - +55°C
Housing material	ABS + bubble glass	ABS + milky glass
Protection type	IP 44	IP 44
Protection class	II	II
Installation type	Wall mounting	Wall mounting
Dimensions	Width 215 mm Height 275 mm Depth 250 mm	Width 215 mm Height 275 mm Depth 250 mm
<b>With motion detector</b>		
Field of detection (with horizontal rotation)	130°	130°
Range of detection (at recommended installation height of 1.80 m)	12 m	12 m
Switching capacity	230 V ~ 50 Hz 500 W 2.2 A (cos phi 1) 115 VA / 0.5 A (cos phi 0.5)	230 V ~ 50 Hz 500 W 2.2 A (cos phi 1) 115 VA / 0.5 A (cos phi 0.5)
Switch-off delay time	approx. 5 sec. - 12 mins.	approx. 5 sec. - 12 mins.
Light value	approx. 5 - 2,000 lux	approx. 5 - 2,000 lux

Technical and design features may be subject to change. The power output may deviate from the specified value by +/- 10%.

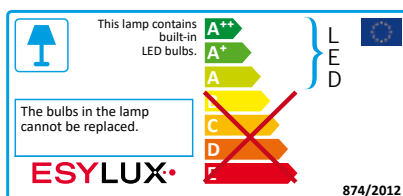

Find out more online at:  
<http://wall-lighting.esylux.com/>

**ESYLUX Deutschland GmbH**

An der Strusbek 40  
22926 Ahrensburg | Deutschland  
t: +49 4102 489 0  
f: +49 4102 489 333  
info@esylux.de  
www.esylux.de

**ESYLUX Belgium nv**

Vlamstraat 7 bus 2  
9450 Denderhoutem-Haaltert | België  
t: +32 53 850 570  
f: +32 53 850 579  
info@esylux.be  
www.esylux.be

**ESYLUX Danmark ApS**

Kokholm 3A  
6000 Kolding | Danmark  
t: +45 76 72 90 90  
info@esylux.dk  
www.esylux.dk

**ESYLUX France SARL**

5 rue de Castiglione  
75001 Paris | France  
t: +33 1 5345 10 55  
info@esylux.fr  
www.esylux.fr

**ESYLUX Nederland B.V.**

Leeghwaterstraat 35  
3364 AE Sliedrecht | Nederland  
t: +31 184 647 000  
f: +31 184 647 070  
info@esylux.nl  
www.esylux.nl

**ESYLUX Norge AS**

Strandveien 35  
1366 Lysaker | Norge  
t: +47 2255 52 00  
f: +47 2255 52 01  
info@esylux.no  
www.esylux.no

**ESYLUX Österreich GmbH**

Hafenstraße 2A  
4020 Linz | Österreich  
t: +43 732 788 188 0  
f: +43 732 788 188 7039  
info@esylux.at  
www.esylux.at

**ESYLUX Portugal, Lda.**

Lagoas Park Edifício 8, Piso 1  
2740-244 Porto Salvo | Portugal  
t: +351 214 236 170  
f: +351 214 236 179  
comercial@esylux.pt  
www.esylux.pt

**ESYLUX Russia**

ООО "ИЗИЛЮКС РУ"  
ул. Малая Калужская  
д. 15, стр. 17 | эт. 3, оф. 541  
119071 г. Москва | Россия  
t: +7 495 782 72 40  
info@esylux.ru  
www.esylux.ru

**ESYLUX Suomi Oy**

Äyritie 12 B  
01510 Vantaa | Suomi  
t: +358 20 779 26 60  
f: +358 20 779 26 69  
info@esylux.fi  
www.esylux.fi

**ESYLUX Sverige AB**

Ljungadalsgatan 2A  
352 46 Växjö | Sverige  
t: +46 470 853 00  
f: +46 470 853 53  
info@esylux.se  
www.esylux.se

**ESYLUX Swiss AG**

Balz-Zimmermannstrasse 7  
Postfach | 8058 Zürich-Flughafen | Schweiz  
t: +41 44 808 61 00  
f: +41 44 808 61 61  
info@esylux.ch  
www.esylux.ch

**ESYLUX Asia Ltd.**

No. 4 32/F Saxon Tower  
7 Cheung Shun Street  
Lai Chi Kok | Kowloon | Hong Kong  
t: +852 3107 89 12  
f: +852 3107 89 99  
sales@esylux.com.hk  
www.esylux.com.hk

**ESYLUX GmbH (Export)**

An der Strusbek 40  
22926 Ahrensburg | Germany  
t: +49 4102 888 80 0  
f: +49 4102 888 80 441  
sales@esylux.com  
www.esylux.com



www.esylux.com