


## PD-CE 360i/24

**Item number**      **GTIN**  
 EP10510724      4015120510724

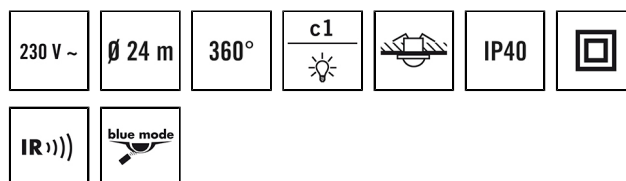

### Technical data

GENERAL	
Device category	Ceiling-mounted presence detector
Included in delivery	Includes lens mask
Product information	Please note the Explanation of circuit breaker in the download area of the product!
User interface	IR remote control
Remote controllable	✓
Conformity	CE, EAC, RoHS, WEEE
Product-specific information	Configuration only possible via ESY-Pen, ESY-App and remote control
Warranty	5 years
ATTACHMENT	
Installation type	Recessed mounting
Installation position	Ceiling
Installation dimension	Installation depth: 67 mm, Ø 68 mm
Type of connection	Push terminal
Connectable wire cross section	1.50 – 1.50 mm <sup>2</sup>
HOUSING	
Dimensions	Height/Depth 32 mm, Ø 82 mm
Weight	133 g
Material	UV-stabilised polycarbonate
Protection type	IP40
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 - 93 %, non-condensing
Colour	opal matt
ELECTRICAL VERSION	
Control system	ON/OFF

### Product description

- Presence detector with **360° field of detection** for recessed ceiling mounting
- **range of up to 24 m** in diameter for use in offices, classrooms, board rooms etc. and hallways with natural lighting
- Ideal for use in **areas with ceilings of up to 10 m**, such as sports halls, warehouses etc.
- 16 A high-performance relay (tungsten pre-contact)
- Default settings ensure immediate operability

### Offers special product features like:

- Simple parameterisation, remote control and documentation with ESY-Pen and ESY-App

Protection class	II
Nominal voltage	230 V ~ / 50 Hz
In-rush current	800 A / 200 µs
Power consumption	0.3 W

SENSORS	
Detection angle	360°
Detection range diagonally	Ø 24 m
Detection range head-on	Ø 11 m
Detection range presence	Ø 8 m
Field of detection	up to 453 m <sup>2</sup>
Recommended installation height	3 m
Max. mounting height	10 m
Light measurement	mixed light
Level of brightness	5–2000 lx

CHANNELS (LIGHTING / HVAC)	
Number of light channels	1
Push button input lighting	1
Push button input HVAC	–
Slave input	✓
Max. number of slave detectors	10
Mode	Semi-automatic, Fully automatic
Switching delay from "dark to light"	300 s
Switching delay from "light to dark"	30 s
Constant light control	–
Channel	<b>C1</b> Lighting
Function	Switching
Switching capacity	230 V/50 Hz, 16 AX

## PD-CE 360i/24

Item number	GTIN
EP10510724	4015120510724

	2300 W/10 A (cos phi = 1) 1150 VA/5 A (cos phi = 0,5) 600 W LED
Switch contact	make contact / non-floating

Push button input	✓
Impulse mode	✓
Switch-off delay time	60 s...30 min (adjustable in steps)

### Factory settings

GENERAL	
Sensitivity	100 %
CHANNELS (LIGHTING / HVAC)	
Channel	C1 Lighting

Operating mode	fully automatic
Level of brightness/switching threshold	400 lx
Switch-off delay time	5 min

### Accessories

Product designation	Item number	Product description	GTIN
<b>Ceiling-mounted presence detector</b>			
PD-CE 360/8 Slave	EP10510748	Slave presence detector for extending the field of detection of a Master presence detector with 360° field of detection for ceiling flush mounting	4015120510748
PD-CE 360/24 Slave	EP10510755	Slave presence detector for extending the field of detection of a Master presence detector with 360° field of detection for ceiling flush mounting	4015120510755
<b>Electrical accessories</b>			
FILTER 230 V	EP10426988	Filter for suppression of inductive loads, such as relays, contactors, fluorescent lamps and transformers	4015120426988
<b>Protection</b>			
BASKET GUARD ROUND SMALL	EM10425615	Basket guard for presence and motion detectors and smoke detectors, Ø 165 mm, height 70 mm	4015120425615
<b>Remote control</b>			
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	4015120425356
REMOTE CONTROL MDi/PDi	EM10425509	IR remote control for presence detectors and motion detectors	4015120425509
REMOTE CONTROL USER	EM10016011	IR remote control for end users	4015120016011

## PD-CE 360i/24

Item number      GTIN  
 EP10510724      4015120510724

Dimension drawing	Field of detections	Detection range	
		<p>■ Diagonally (A)      Ø 24 m</p>	
		<p>■ Frontal (B)      Ø 11 m</p>	
		<p>■ Presence area (C)      Ø 8 m</p>	

Circuit diagram	Circuit diagram	

Standard operation

Standard operation with additional control by means of a closing button. If required, the light can be manually switched on or off with the button.

Circuit diagram	Circuit diagram	

An RC filter may be required when connecting inductors (e.g. relays, contactors, ballasts).

Master/slave connection:  
 The master device controls connected systems according to the programmed settings.  
 The sole purpose of the slave devices is to register presence and transmit an impulse to the master device when movement is detected.  
**Caution:** a maximum of 10 slave devices may be connected to one master device.