

DATA SHEET

ESYLUX

PD 360/24 BASIC SMB

Item number

EB10430893

GTIN

4015120430893



Technical data

GENERAL

Device category	Ceiling-mounted presence detector
Product information	Please note the Explanation of circuit breaker in the download area of the product! Mounting position: Keep a safe distance of 5 m from radio antennas (e.g. WiFi access points).
User interface	Adjusting controller
Remote controllable	-
Conformity	CE, EAC, RoHS, WEEE
Product-specific information	Lens mask and spacer not included in delivery
Warranty	5 years

ATTACHMENT

Installation type	Surface mounted (plaster)
Installation position	Ceiling
Type of connection	Push terminal
Connectable wire cross section	1.5 - 1.5 mm ²

HOUSING

Dimensions	Height/Depth 73 mm, Ø 101 mm
Weight	126 g
Material	UV-stabilised polycarbonate
Protection type	IP40
Permissible ambient temperature	0 °C...+50 °C
Relative humidity	5 - 93 %, non-condensing
Colour	white, similar to RAL 9010

ELECTRICAL VERSION

Control system	ON/OFF
Protection class	II

Ø 24 m	360°	ON/OFF	IP40	1 CH
--------	------	--------	------	------

Product description

- Presence detector with **360° field of detection** For ceiling mounting
- **Range of up to 24 m** in the diameter at a recommended installation height of 3 m
- 10 A high-performance relay
- Zero-cross switching for gentle switching
- Factory setting for immediate operational readiness

Offers special product features like:

- Zero-cross switching

Nominal voltage	230 V ~ / 50 Hz
In-rush current	78 A / 5 ms
Power consumption	0.2 W

SENSORS

Detection angle	360°
Detection range diagonally	Ø 24 m
Detection range head-on	Ø 8 m
Detection range presence	Ø 6 m
Field of detection	up to 453 m ²
Recommended installation height	3 m
Max. mounting height	5 m
Light measurement	mixed light
Level of brightness	5 - 2000 lx

CHANNELS (LIGHTING / HVAC)

Number of light channels	1
Push button input lighting	1
Push button input HVAC	-
Number of parallel switchable detectors	8
Slave input	-
Mode	Fully automatic
Switching delay from "dark to light"	300 s
Switching delay from "light to dark"	30 s
Constant light control	-
Channel	C1 Lighting
Function	Switching
Switching capacity	230 V/50 Hz 2300 W/10 A (cos phi = 1) 1150 VA/5 A (cos phi = 0,5)

PD 360/24 BASIC SMB

Item number	GTIN
EB10430893	4015120430893

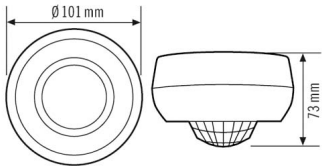
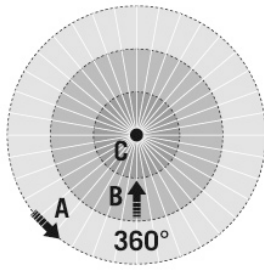
	600 W LED	Impulse mode	✓
Switch contact	make contact / non-floating	Switch-off delay time	15 s...30 min (adjustable in steps)
Push button input	✓		

Factory settings

Channel	C1 Lighting	Level of brightness/switching threshold	500 lx
Operating mode	fully automatic	Switch-off delay time	5 min

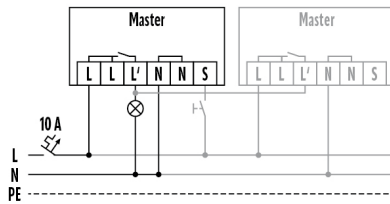
Accessories

Product designation	Item number	Product description	GTIN
Cover			
BASIC 24 LENS MASK	EB10423109	Lens mask 24/32 m	4015120423109
Electrical accessories			
FILTER 230 V	EP10426988	Filter for suppression of inductive loads, such as relays, contactors, fluorescent lamps and transformers	4015120426988
Protection			
BASKET GUARD ROUND LARGE	EM10425608	Basket guard for presence and motion detectors and smoke detectors, Ø 180 mm, height 90 mm	4015120425608

Dimension drawing	Field of detections	Detection range	
		Diagonally (A)	Ø 24 m
		Frontal (B)	Ø 8 m
		Presence area (C)	Ø 6 m

Item number	GTIN
EB10430893	4015120430893

Circuit diagram



Standard with optional control via a closing button and parallel wiring of max. six devices.

Detailed product description

- Presence detector with **360° field of detection** For ceiling mounting
- **Range of up to 24 m** in the diameter at a recommended installation height of 3 m
- 10 A high-performance relay
- Zero-cross switching: Extension of the service life of the relay and bulbs with electronic ballasts (e.g. fluorescent lamps, LED) thanks to more gentle switching in zero-cross switching.
- Factory setting for immediate operational readiness
- Automatic light control depending on presence and daylight
- Additional switch input
- Standard version as surface-mounted device, with special surface-mounted box for additional cabling space
- Sensing range upgrade through parallel connection