


## CU-DIN SB 6-CH 10A KNX

**Item number**      **GTIN**  
 EC10430367      4015120430367

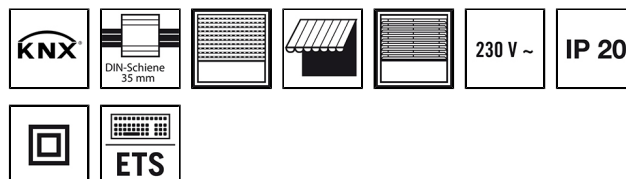

### Product description

KNX DIN rail module, blind actuator, 12-way with 6 channels, 10-A switching capacity



### Technical data

#### GENERAL

Device category	Actuator
User interface	ETS-Software
Remote controllable	–
Conformity	CE, EAC, RoHS, WEEE
Warranty	3-year

#### ATTACHMENT

Installation type	DIN rail
Installation position	Switching cabinet
Installation dimension	Installation length: 90 mm x Installation width: 216 mm x Installation depth: 65 mm
Type of connection	Push terminal
Connectable wire cross section	0.20 – 6.00 mm <sup>2</sup>

#### HOUSING

Dimensions	Length 90 mm x Width 216 mm x Height/Depth 65 mm
Weight	522 g
Protection type	IP20
Permissible ambient temperature	0 °C...+45 °C
Relative humidity	5 - 93 %, non-condensing
Colour	grey

#### ELECTRICAL VERSION

Control system	KNX
Protection class	II
Nominal voltage	29 - 31 V DC
Power consumption	0.4 W
Power consumption	15 mA
Stand-by consumption	< 150 mW

#### AUTOMATION

Number of inputs	0
Power loss	8 W
Rated current	max. 10 A
Rated current (cos # = 0.8)	max. 10 A
Min. switching capacity	0,1mA / 1V
DC switching capacity (resistive load)	10 A / 12 V DC
Switching capacity incandescent lamps	1600 W
Switching capacity engines	746 W
Switching capacity inductive transformers	1000 W
Switching capacity fluorescent lamps (parallel compensated)	1000 W
Switching capacity fluorescent lamps (uncompensated)	800 W
Horizontal pitch (HP)	12

# DATA SHEET



## CU-DIN SB 6-CH 10A KNX

**Item number**      **GTIN**  
EC10430367      4015120430367

### Dimension drawing

---

