


DATA SHEET

ESYLUX

OS 80 LED SPOT 5K WH

Item number EL10523113
GTIN 4015120523113

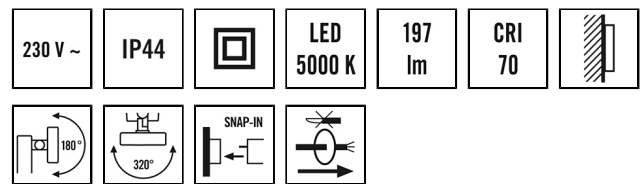

Technical data

GENERAL	
Device category	Spotlight
Remote controllable	–
Conformity	CE, EAC, RoHS, WEEE
Warranty	3 years

ATTACHMENT	
Installation type	Surface mounting
Installation position	Wall
Type of connection	Screwed terminal
Connectable wire cross section	1.5 – 2.5 mm ²
Number of contacts	3

HOUSING	
Dimensions	Length 267 mm x Width 153 mm x Height/Depth 99 mm
Weight	1149 g
Material	powder-coated aluminium, Fibreglass-reinforced plastic

Product description

- LED floodlights in high-grade die cast aluminium housing
- High power LEDs, light colour approx. 5000 K white
- One-handed plug-in base for quick and easy installation

Protection type	IP44/lamp head IP65
Permissible ambient temperature	-25 °C...+50 °C
Colour	white, similar to RAL 9010


ELECTRICAL VERSION	
Control system	ON/OFF
Protection class	II
Nominal voltage	230 V ~ / 50 Hz

LIGHT	
Diffuser	transparent
Light emission	direct
Beam angle	64 °
Flicker factor	<10 %
Rated output P	9 W
Luminous flux	394 lm
Luminous efficacy	43 lm/W
Colour temperature	5000 K
Colour rendering index Ra	> 70


OS 80 LED SPOT 5K WH

Item number **GTIN**
EL10523113 4015120523113

Dimension drawing

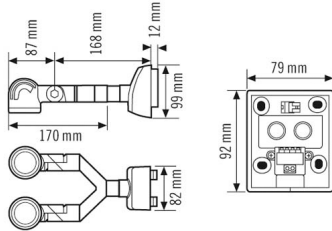

Light distribution

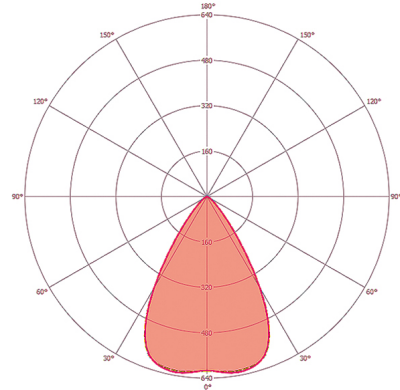

Detailed product description

- LED floodlights in high-grade die cast aluminium housing
- High power LEDs, light colour 5000 K white
- One-handed plug-in base for quick and easy installation
- Two line entrances with self-sealing membranes
- UV-resistant, weatherproof, corrosion-resistant aluminium housing
- Corrosion-free, stainless steel mounting screws
- Setting aid on joint for easy alignment of the lights
- High luminous efficacy with low power consumption