


## PD-C 180i/16 UC

**Item number** EP10427305  
**GTIN** 4015120427305

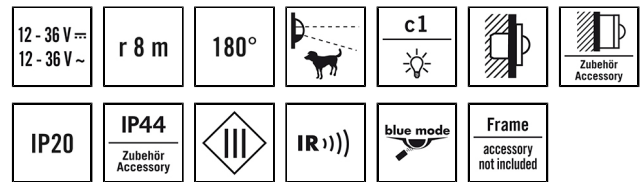

### Product description

- Presence detector with **180° field of detection** for wall mounting
- range of up to 16 m in diameter for the **use in connection with building management systems**
- Operating voltage 12-36 V DC or AC voltage (AC/DC)
- Potential-free software-controlled switching output (C/O)
- Connectable and disconnectable display of detection
- Silent switch up to the maximum of 2 A

### Offers special product features like:

- Simple parameterisation, remote control and documentation with ESY-Pen and ESY-App



### Technical data

GENERAL	
Device category	Wall-mounted presence detector
User interface	IR remote control
Remote controllable	✓
Conformity	CE, EAC, RoHS, WEEE
Warranty	5 years
ATTACHMENT	
Installation type	Flush mounting / device box Ø 68 mm
Installation position	Wall
Installation dimension	Installation depth: 34 mm, Ø 60 mm
Type of connection	Push terminal
Connectable wire cross section	1.50 – 2.50 mm <sup>2</sup>
HOUSING	
Dimensions	Length 70 mm x Width 70 mm x Height/Depth 55 mm
Weight	64 g
Material	UV-stabilised polycarbonate
Protection type	IP20, IP44 depending on cover (order separately)
Protection type with accessory	IP44 depending on cover (order separately)
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 – 93 %, non-condensing
Colour	opal matt
ELECTRICAL VERSION	
Control system	12 – 36 V UC
Protection class	III
Nominal voltage	12 – 36 V AC/DC

Power consumption	0.3 W
-------------------	-------

SENSORS	
Detection angle	180° horizontal, 60° vertical
Detection range diagonally	Ø 16 m
Detection range head-on	Ø 12 m
Detection range presence	Ø 8 m
Field of detection	up to 101 m <sup>2</sup>
Recommended installation height	1.1 m
Max. mounting height	2.2 m
Light measurement	mixed light
Level of brightness	5 – 2000 lx

CHANNELS (LIGHTING / HVAC)	
Number of light channels	1
Push button input lighting	1
Push button input HVAC	–
Slave input	–
Mode	Semi-automatic, Fully automatic
Switching delay from "dark to light"	300 s
Switching delay from "light to dark"	30 s
Constant light control	✓
Channel	C1 Lighting
Function	Switching, Regulate, Dimming
Switching capacity	12 – 36 V UC (AC/DC), 2 A
Switch contact	make contact / floating
Push button input	✓
Impulse mode	✓
Switch-off delay time	60 s...60 min (adjustable in steps)

## PD-C 180i/16 UC

<b>Item number</b>	<b>GTIN</b>
EP10427305	4015120427305

### Factory settings

<b>GENERAL</b>		Operating mode	fully automatic
Sensitivity	100 %	Level of brightness/switching threshold	2000 lx
<b>CHANNELS (LIGHTING / HVAC)</b>		Impulse mode ON	✓
Channel	C1 Lighting		

### Accessories

Product designation	Item number	Product description	GTIN
<b>Cover</b>			
COVER IP20 WH	EM10055102	Cover for wall detectors from the STANDARD series, IP20, white, similar to RAL 9010	4015120055102
COVER IP20 SWH	EM10055119	Cover for wall detectors from the STANDARD series, IP20, white, similar to RAL 9016	4015120055119
COVER IP20 CWH	EM10055126	Cover for wall detectors from the STANDARD series, IP20, white, similar to RAL 1013	4015120055126
COVER IP20 AN	EM10055133	Cover for wall detectors from the STANDARD series, IP20, anthracite, similar to RAL 7021	4015120055133
COVER IP20 SR	EM10055140	Cover for wall detectors from the STANDARD series, IP20, silver	4015120055140
COVER ELK RS/PLUS IP20 WH	EM10055270	Cover for wall detector fits with Elko RS/PLUS, IP20, white	4015120055270
COVER SEL Trend IP20 WH	EM10055287	Cover for wall detector fits with Schneider Electric Trend, IP20, white	4015120055287
COVER SEL EXX IP20 WH	EM10055294	Cover for wall detector fits with Schneider Electric Exxact, IP20, white	4015120055294
COVER IP44 WH	EM10055157	Cover for wall detectors from the STANDARD series, IP44, white	4015120055157
COVER BER S1 IP20 PWH	EP10427107	Cover for wall detector fits with Berker S.1, IP20, polar white	4015120427107
COVER BER S1 IP20 WH	EP10427114	Cover for wall detector fits with Berker S.1, IP20, white	4015120427114
COVER BUJ REF IP20 WH	EP10427145	Cover for wall detector fits with Busch-Jäger Reflex, IP20, white	4015120427145
Cover IP20-BJSI cream	EP10427152	Cover for wall detector fits with Busch-Jäger Reflex, IP20, cream white	4015120427152
COVER GIR S55 IP20 WH	EP10427169	Cover for wall detector fits with Gira Standard 55, IP20, white	4015120427169
COVER GIR S55 IP20 CWH	EP10427176	Cover for wall detector fits with Gira Standard 55, IP20, cream white	4015120427176
<b>Mounting</b>			
MOUNTING BOX IP44 SM WH	EM10055164	Surface-mounted box for wall detectors from the STANDARD series, IP44, white	4015120055164
<b>Remote control</b>			
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	4015120425356
REMOTE CONTROL MDi/PDi	EM10425509	IR remote control for presence detectors and motion detectors	4015120425509
Mobil-PDi/MDi-universal	EP10433993	Remote control for quick and precise setting of various parameters	4015120433993

## PD-C 180i/16 UC

**Item number**      **GTIN**  
 EP10427305      4015120427305

Dimension drawing	Field of detections	Detection range	
		<p>■ Diagonally (A)</p>	<p>Ø 16 m</p>
		<p>■ Frontal (B)</p>	<p>Ø 12 m</p>
		<p>■ Presence area (C)</p>	<p>Ø 8 m</p>

### Detailed product description

- Presence detector with **180° field of detection** for wall mounting
- range of up to 16 m in diameter for the **use in connection with building management systems**
- Operating voltage 12-36 V DC or AC voltage (AC/DC)
- Potential-free software-controlled switching output (C/O)
- Connectable and disconnectable display of detection
- Silent switch up to the maximum of 2 A
- Compatible with brand switches, covers IP 20 in different colours available
- Additional switch input for individual manual control
- Universal surface-mounted box IP 20/IP 44 with triple diaphragm line entrance