


## PD-C 360/32 Slave

**Item number**      **GTIN**  
 EP10427770      4015120427770

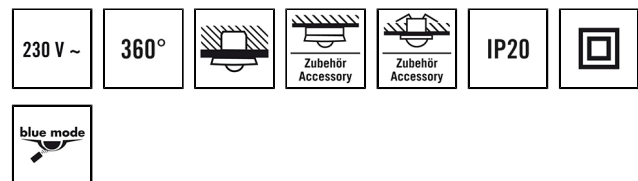

### Product description

- "Slave" presence detector for extending the field of detection of a "master" presence detector with **360° field of detection** for ceiling mounting
- **Range of up to 32 m** in diameter as a cost efficient system upgrade with up to 10 additional extensions
- Ideal for use in **areas with ceilings of up to 10 m**, such as sports halls, warehouses etc.
- Connection of the "Slave" detector to many presence detectors of the PD-C series possible



### Technical data

GENERAL	
Device category	Ceiling-mounted presence detector
Included in delivery	includes lens mask
User interface	Slide switch (DIP)
Remote controllable	–
Conformity	CE, EAC, RoHS, WEEE
Warranty	5 years
ATTACHMENT	
Installation type	Recessed mounting / device box Ø 68 mm
Installation position	Ceiling
Installation dimension	Installation depth: 24 mm, Ø 60 mm
Type of connection	Push terminal
Connectable wire cross section	1.50 – 2.50 mm <sup>2</sup>
HOUSING	
Dimensions	Height/Depth 70 mm, Ø 108 mm
Weight	140 g
Material	UV-stabilised polycarbonate
Protection type	recessed-mounted IP20, IP20/IP54 with surface-mounted box (order separately), IP20 as recessed ceiling-mounted version (order installation set separately)
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 - 93 %, non-condensing
Colour	white, similar to RAL 9010
ELECTRICAL VERSION	
Control system	ON/OFF

Protection class	II
Nominal voltage	230 V ~ / 50 Hz
Power consumption	0.3 W
Stand-by consumption	< 0.3 W

SENSORS	
Detection angle	360°
Detection range diagonally	Ø 32 m
Detection range head-on	Ø 11 m
Detection range presence	Ø 8 m
Field of detection	up to 805 m <sup>2</sup>
Range adjustment	mechanically with included cut to size lens mask
Recommended installation height	3 m
Max. mounting height	10 m
Light measurement	none

CHANNELS (LIGHTING / HVAC)	
Push button input HVAC	–
Slave input	✓
Constant light control	–
Channel	<b>C1</b> Lighting
Function	Not relevant
Switch contact	Bus system
Push button input	–
Impulse mode	–
Switch-off delay time	30 min (adjustable in steps)

## PD-C 360/32 Slave

<b>Item number</b>	<b>GTIN</b>
EP10427770	4015120427770


### Factory settings

GENERAL		Operating mode	fully automatic
Sensitivity	100 %	Level of brightness/switching threshold	400 lx
CHANNELS (LIGHTING / HVAC)		Switch-off delay time	5 min
Channel	C1 Lighting		


### Accessories

Product designation	Item number	Product description	GTIN
<b>Cover</b>			
COMPACT COVER SET 24/32 SR	EP10425431	Cover set for COMPACT series, 24 m/32 m, consists of cover and design ring, silver	4015120425431
COMPACT COVER SET 24/32 BK	EP00007491	Cover set for COMPACT series, 24 m/32 m, consists of cover and design ring, black	4015120007491
<b>Mounting</b>			
COMPACT MOUNTING BOX IP20 SM WH	EP10425370	Surface-mounted box for COMPACT series, IP20, white	4015120425370
COMPACT MOUNTING BOX IP20 SM SR	EP10425387	Surface-mounted box for COMPACT series, IP20, silver	4015120425387
COMPACT MOUNTING BOX IP54 SM WH	EP10425905	Surface-mounted box for COMPACT series, IP54, white	4015120425905
COMPACT MOUNTING BOX IP54 SM SR	EP10425912	Surface-mounted box for COMPACT series, IP54, silver	4015120425912
MOUNTING SET IP20 FM 62 WH	EP10425929	Recessed ceiling mounting set includes installation bracket and dust-protected box, 62 mm	4015120425929
COMPACT MOUNTING BOX IP54 SM BK	EP10426940	Surface-mounted box for COMPACT series, IP54, black	4015120426940
COMPACT MOUNTING BOX IP20 SM BK	EP10426933	Surface-mounted box for COMPACT series, IP20, black	4015120426933
<b>Protection</b>			
BASKET GUARD ROUND LARGE	EM10425608	Basket guard for presence and motion detectors and smoke detectors, Ø 180 mm, height 90 mm,	4015120425608
BASKET GUARD ROUND SMALL	EM10425615	Basket guard for presence and motion detectors and smoke detectors, Ø 165 mm, height 70 mm,	4015120425615

### Dimension drawing



### Field of detections



### Detection range

■ Diagonally (A)	Ø 32 m
■ Frontal (B)	Ø 11 m
■ Presence area (C)	Ø 8 m


# DATA SHEET

## PD-C 360/32 Slave

**Item number**      **GTIN**  
EP10427770      4015120427770

### Circuit diagram

---

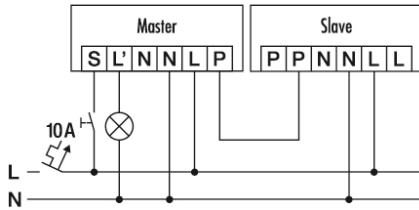

---

*PD-C 360i/8, PD-C 360i/8 MIC, PD-C 360i/24, PD-C 360i/32, PD-C 360i/40 Corridor*