


PD-FLAT 360i/8 LARGE ROUND WHITE KNX

Item number EP10428685
GTIN 4015120428685

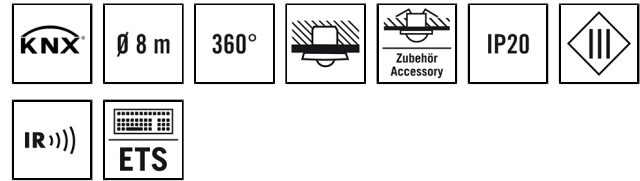

Technical data

GENERAL	
Device category	Ceiling-mounted presence detector
Included in delivery	includes lens mask
User interface	IR remote control with "blue mode" technology, ETS-Software
Remote controllable	✓
Conformity	CE, EAC, RoHS, WEEE
Warranty	5 years
ATTACHMENT	
Installation type	Flush-mounted/Device socket \varnothing 68 mm
Installation position	Ceiling
Installation dimension	Installation depth: 24 mm, \varnothing 60 mm
Type of connection	Push terminal
Connectable wire cross section	0.75 – 2.5 mm ²
HOUSING	
Dimensions	Height/Depth 76 mm, \varnothing 104 mm
Weight	116 g
Material	UV-stabilised polycarbonate
Protection type	IP20
Permissible ambient temperature	5 °C...+35 °C
Relative humidity	5 – 93 %, non-condensing
Colour	white, similar to RAL 9010
ELECTRICAL VERSION	
Control system	KNX
Protection class	III
Nominal voltage	29 – 31 V DC

Product description

- **KNX Design** recessed ceiling-mounted presence detector with **360° field of detection**
- **Range approx. 8 m in \varnothing** at a recommended installation height of 3 m (maximum installation height 5 m)
- For use in KNX (EIB), TP (twisted pair) bus system in conjunction with other KNX components
- Parameter and function settings via ETS (Engineering Tool Software)
- Low profile design with plastic design covers (\varnothing 104 mm): round, white - variably interchangeable

Offers special product features like:

- Presence and daylight dependent constant light control
- Simple parameterisation, remote control and documentation with ESY-Pen and ESY-App
- KNX functions: Alarm, twilight switch, brightness detection, light-dependent motion detection, snooze function, scene telegram via object

Power consumption	0.2 W
Power consumption	6 mA

SENSORS

Detection angle	360°
Detection range diagonally	\varnothing 8 m
Detection range head-on	\varnothing 6 m
Detection range presence	\varnothing 4 m
Field of detection	up to 50 m ²
Recommended installation height	2.5 m
Max. mounting height	5 m
Light measurement	mixed light
Level of brightness	3 – 1000 lx

CHANNELS (LIGHTING / HVAC)

Number of light channels	2
Number of HVAC-channels	1
Push button input lighting	2
Push button input HVAC	✓
Slave input	✓
Mode	Semi-automatic, Fully automatic
Switching delay from "dark to light"	300 s
Switching delay from "light to dark"	30 s
Constant light control	✓
KNX input	manual light control, block objects, reset, slave
KNX output	presence, status, light value, HVAC
KNX functions	Presence simulation, Manual override, Master- / slave-toiminto, Night-light feature,

PD-FLAT 360i/8 LARGE ROUND WHITE KNX

Item number	GTIN
EP10428685	4015120428685

	Sensitivity configurable, Sends a telegram at regular intervals
Channel	C1 Lighting
Function	Switching, Regulate
Switch contact	Bus system
Push button input	–
Impulse mode	–
Switch-off delay time	30 s...720 min (adjustable in steps)
Orientation light	disabled/10 – 50 %, 2 values can be selected
Switch-off delay time, orientation light	60 s...240 min
Channel	C2 Lighting
Function	Switching, Regulate

Offset setting	c2 offset from c1 (-50 % to +50 %)
Switch contact	Bus system
Push button input	–
Switch-off delay time	10 s...60 min (adjustable in steps)
Orientation light	disabled/10 – 50 %, 2 values can be selected
Switch-off delay time, orientation light	60 s...250 min
Channel	C3 HVAC
Function	Switching
Switch contact	Bus system
Push button input	–
Switch-off delay time	10 s...60 min (adjustable in steps)

Factory settings

GENERAL	
Sensitivity	100 %
CHANNELS (LIGHTING / HVAC)	
Channel	C1 Lighting

Operating mode	fully automatic
Level of brightness/switching threshold	500 lx
Switch-off delay time	5 min
Luminous efficiency of orientation light	10 %

Accessories


Product designation	Item number	Product description	GTIN
Cover			
FLAT COVER LARGE ROUND WH	EP10428579	Cover for FLAT series, 105 mm, round, white	4015120428579
FLAT COVER LARGE ROUND BK	EP10428098	Cover for FLAT series, 105 mm, round, black	4015120428098
FLAT COVER SQUARE WH	EP00007248	Cover for FLAT series, square, white	4015120007248
Mounting			
FLAT MOUNTING SET IP20 FM	EP10426889	Recessed ceiling mounting set for FLAT series includes installation bracket and dust-protected box	4015120426889
COMPACT MOUNTING BOX IP20 SM WH	EP10425370	Surface-mounted box for COMPACT series, IP20, white	4015120425370
Protection			
BASKET GUARD ROUND LARGE	EM10425608	Basket guard for presence and motion detectors and smoke detectors, Ø 180 mm, height 90 mm	4015120425608
BASKET GUARD ROUND SMALL	EM10425615	Basket guard for presence and motion detectors and smoke detectors, Ø 165 mm, height 70 mm	4015120425615
Remote control			
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	4015120425356
TELESCOPE MAGNET	EC10430022	Telescope magnet	4015120430022
REMOTE CONTROL PDi/USER	EM10425547	IR remote control for end users of presence detectors	4015120425547

PD-FLAT 360i/8 LARGE ROUND WHITE KNX

Item number **GTIN**
 EP10428685 4015120428685

Dimension drawing	Field of detections	Detection range	
		<ul style="list-style-type: none"> ■ Diagonally (A) \varnothing 8 m 	
		<ul style="list-style-type: none"> ■ Frontal (B) \varnothing 6 m 	
		<ul style="list-style-type: none"> ■ Presence area (C) \varnothing 4 m 	

Circuit diagram



Standard operation.

Detailed product description

- **Recessed ceiling mounted KNX presence detector with 360° field of detection**
- **Range approx. 8 m in \varnothing** at a recommended installation height of 3 m (maximum installation height 5 m)
- For use in KNX (EIB), TP (twisted pair) bus system in conjunction with other KNX components
- Parameter and function settings via ETS (Engineering Tool Software)
- Manual, temporary switching/dimming via user remote control
- Communication objects (full listing of communication objects at www.esylux.com)
 - Constant light control or switching
 - Heating, ventilation and air conditioning (HVAC)
 - Block object for heating, ventilation and air conditioning (HVAC)
 - Light value output (2 byte)
 - Status report
 - Presence output (Heating, ventilation and air conditioning) HVAC
 - Can be used as "master" or "slave"
 - KNX button control for light channels
 - Fully automatic or semi-automatic
 - 2 light values selectable for orientation light 10 % - 50 %
 - Test mode
- Correction factor for interior lighting
- Sensitivity sensor, adjustable from 1 to 4
- Flush-mounted device as standard
- Low profile design with plastic design covers (\varnothing 104 mm): round, white - variably interchangeable
- Recessed ceiling mounting possible with accessories
- Targeted masking out of areas by means of an enclosed lens mask