

## PUSH BUTTON x4 DALI-2 WH


**Item number**

EP10431616

**GTIN**

4015120431616

DALI-2

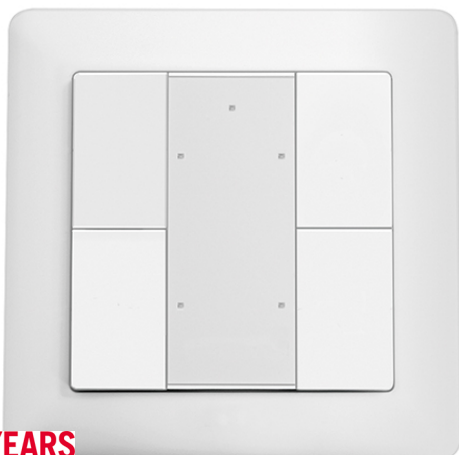

**Product description**

- 4-way button to act as certified DALI-2 input device
- Individual function allocation using application controller (DALI-2 control unit)
- Function assignments of buttons can be individually labelled
- Power supply from DALI bus
- Compatible with 55 mm frames from most manufacturers

**Technical data**

GENERAL	
Device category	Push button
Conformity	CE, RoHS, WEEE, EAC
Warranty	5 years
ATTACHMENT	
Installation type	Recessed mounting
Installation position	Wall
Installation dimension	Installation length: 55.5 mm x Installation width: 55.5 mm x Installation depth: 8 mm
Type of connection	Push terminal
Connectable wire cross section	0.75 – 2.5 mm <sup>2</sup>
HOUSING	
Dimensions	Length 71 mm x Width 71 mm x Height/Depth 21.5 mm

Weight	62 g
Material	UV-resistant plastic
Protection type	IP20
Permissible ambient temperature	-20 °C...+50 °C
Relative humidity	max. 80 %, non-condensing
Colour	white


ELECTRICAL VERSION	
Control system	DALI-2
Protection class	III
Nominal voltage	12.5 – 22.5 V DC
No load current DALI	2 mA
Peak current DALI	10 mA

AUTOMATION	
Bus voltage	12 - 22,5 V DC


## PUSH BUTTON x4 DALI-2 WH

**Item number**      **GTIN**  
EP10431616      4015120431616

### Dimension drawing




### Circuit diagram



Standard operation.

### Circuit diagram



Master/slave connection for presence detectors: a maximum of 8 slave devices may be connected to one master.

### Detailed product description

- 4-way button to act as certified DALI-2 input device
- Individual function allocation using application controller (DALI-2 control unit)
- Function assignments of buttons can be individually labelled
- Power supply from DALI bus
- Compatible with 55 mm frames from most manufacturers