


DATA SHEET

CELINE PNL 1200 LDP SO 3400 8TW IP20 ELC

Item number **GTIN**
EQ10126123 4015120126123

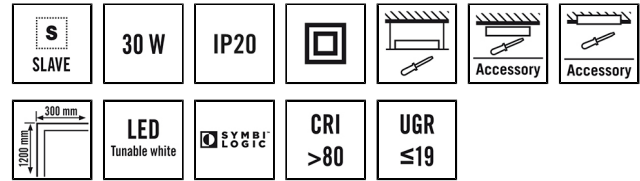

Product description

- LED light with opal (MILKY) cover (diffuser)
- Can be used as a panel light for ceiling systems with concealed or visible mounting rails for system dimensions 1200 x 300 mm (please note any special features and restrictions stipulated by the ceiling system manufacturer)
- LED output 30W
- Light for ESYLUX Light Control for interlinking with ESYLUX Light Controller via RJ45 (not included in delivery)
- Colour temperature: approx. 2700-6500 K (Tunable White)



Technical data

GENERAL	
Warranty	5 years
Device category	Recessed light
Product information	ELC system lights with simple plug-and-play installation require a combination of ELC system components: ELC main lighting, control unit, sensor system, wiring and optional buttons as accessories.
Remote controllable	–
Conformity	CE, EAC, RoHS, WEEE
ATTACHMENT	
Installation type	Insert
Installation position	Ceiling
Installation dimension	Installation length: 1200 mm x Installation width: 300 mm x Installation depth: 140 mm
Type of connection	Socket
Connector	RJ45
HOUSING	
Dimensions	Length 1195 mm x Width 296 mm x Height/Depth 91 mm
Weight	4400 g
Material	Varnished steel
Protection type	IP20
Permissible ambient temperature	0 °C...+40 °C
Relative humidity	5 – 93 %, non-condensing
Colour	white, similar to RAL 9003

Glow wire test in accordance with IEC 60695-2-10 650 °C

ELECTRICAL VERSION

Control system	ELC (ESYLUX Light Control)
Protection class	III
Nominal voltage	42 V DC

LIGHT

Diffuser	semi-opal
Glare suppression	LDP (linear-prismatic)
Light emission	direct
Beam angle	90 °
Unified Glare Rating	≤ 19
Flicker factor	0 %
Rated output P	27 W
Luminous flux	3350 lm
Luminous efficacy	124 lm/W
Colour temperature	2700 – 6500 K (Tunable White)
Colour rendering index Ra	> 80
Colour tolerance	6 SDCM
Color Quality Scale	> 80
L70B10 lifetime at 25 °C	75000 h
Life time L70B50 at 25 °C	95000 h
Life time L80B10 at 25 °C	50000 h
Life time L80B50 at 25 °C	60000 h
Life time L90B10 at 25 °C	25000 h
Life time L90B50 at 25 °C	30000 h
Photobiological safety	RG0

CELINE PNL 1200 LDP SO 3400 8TW IP20 ELC

Item number	GTIN
EQ10126123	4015120126123

System components

Product designation	Item number	Product description	GTIN
Cable			
CABLE RJ10 10m WH	EC10431500	Connection cable RJ10, 10 m	4015120431500
CABLE RJ10-OPEN END 10m WH	EC10431517	Connection cable RJ10 Open end, 10 m	4015120431517
CABLE RJ11 10m WH	EC10431524	Connection cable RJ11, 10 m, white	4015120431524
CABLE RJ45 5m BL	EQ10019982	Connection cable RJ45, 5 m, blue	4015120019982
CABLE RJ45 10m BL	EQ10019999	Connection cable RJ45, 10 m, blue	4015120019999
CABLE RJ45 5m RD	EQ10019890	Connection cable RJ45, 5 m, red	4015120019890
CABLE RJ45 10m RD	EQ10020155	Connection cable RJ45, 10 m, red	4015120020155
CABLE-SET RJ45 5m TW x4	EC10431128	Connection cable set for SMARTDRIVER x4 TW series	4015120431128
CABLE-SET RJ45 10m TW x4	EC10431135	Connection cable set for SMARTDRIVER x4 TW series	4015120431135
CABLE-SET RJ45 5m TW x6	EC10431166	Connection cable set for SMARTDRIVER x6 TW series	4015120431166
CABLE-SET RJ45 10m TW x6	EC10431173	Connection cable set for SMARTDRIVER x6 TW series	4015120431173
CABLE-SET RJ45 5m TW x8	EC10431203	Connection cable set for SMARTDRIVER x8 TW series	4015120431203
CABLE-SET RJ45 10m TW x8	EC10431210	Connection cable set for SMARTDRIVER x8 TW series	4015120431210
Ceiling-mounted presence detector			
PD 360i/8 BASIC ELC	EB10431357	Presence detector for ESYLUX Light Control with 360° field of detection for ceiling mounting	4015120431357
PD-C 360i/8 ELC	EP10427602	Presence detector with 360° field of detection for ceiling mounting	4015120427602
PD-C 360i/24 ELC	EP10427619	Presence detector with 360° field of detection for ceiling mounting	4015120427619
Control			
SMARTDRIVER x4 TW ELC	EC10430572	Light control for up to 4 lights with Tunable White	4015120430572
SMARTDRIVER x4 TW ELC KNX	EC10430589	Light control for up to 4 lights with Tunable White	4015120430589
SMARTDRIVER x6 TW ELC	EC10431005	Light control for up to 6 lights with Tunable White	4015120431005
SMARTDRIVER x6 TW ELC KNX	EC10431029	Light control for up to 6 lights with Tunable White	4015120431029
SMARTDRIVER x8 TW ELC	EC10431036	Light control for up to 8 lights with Tunable White	4015120431036
SMARTDRIVER x8 TW ELC KNX	EC10431050	Light control for up to 8 lights with Tunable White	4015120431050
SMARTDRIVER-2 TW IR 2C+2 x4 ELC	EC10431418	Light control for up to 4 lights with Tunable White	4015120431418
SMARTDRIVER-2 TW IR 2C+2 x6 ELC	EC10431487	Light control for up to 6 lights with Tunable White	4015120431487
SMARTDRIVER-2 TW IR 2C+2 x8 ELC	EC10431494	Light control for up to 8 lights with Tunable White	4015120431494
Push button			
PUSH BUTTON x8 TW ELC	EC10430930	DALI 8 x push button Tunable White	4015120430930
PUSH BUTTON x8 CLASSROOM ELC	EC10431241	DALI 8-way push button	4015120431241
PUSH BUTTON x4 PATIENT ROOM ELC	EC10431258	DALI 4-way push button	4015120431258
PUSH BUTTON x8 PATIENT ROOM ELC	EC10431265	DALI 8-way push button	4015120431265

Accessories

Product designation	Item number	Product description	GTIN
Control gear			
DRIVER SET TW 38W RJ45 WAGO WINSTA DALI DT8	EQ10127755	Plug-and-play LED driver set DALI DT8, WAGO WINSTA	4015120127755


CELINE PNL 1200 LDP SO 3400 8TW IP20 ELC

Item number	GTIN
EQ10126123	4015120126123


Accessories

Product designation	Item number	Product description	GTIN
Mounting			
MOUNTING FRAME 1200/1250 SM WH	EQ10113765	Surface-mounted ceiling installation frame 1200/1250 for panel lights	4015120113765
Protection			
DROP PROTECTION	EQ10121616	Steel cable for securing ESYLUX panel lights to the ceiling.	4015120121616
Remote control			
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	4015120425356

Dimension drawing



Light distribution

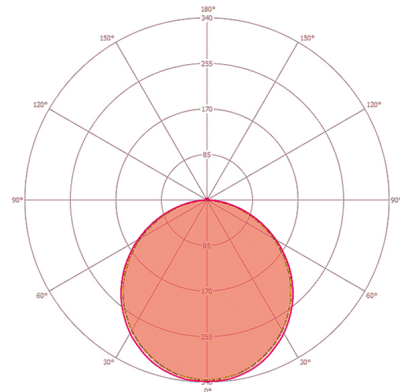

Detailed product description

- LED light with opal (MILKY) cover (diffusor)
- Can be used as a panel light for ceiling systems with concealed or visible mounting rails for system dimensions 1200 x 300 mm (please note any special features and restrictions stipulated by the ceiling system manufacturer)
- LED output 30W
- Light for ESYLUX Light Control for interlinking with ESYLUX Light Controller via RJ45 (not included in delivery)
- Colour temperature: 2700 K to 6500 K (Tunable White)