

DRIVER-SET 30W RJ45

Item number	GTIN
EQ10127786	4015120127786



Product description

- ON/OFF LED driver set for ESYLUX satellite LED lights with constant light colour
- Max. power output 30 W
- Current output 700 mA
- Connected to the driver on the primary side: 150-mm white cable with a 3-pin push terminal, 2.5 mm³, in a junction box with cord grips
- Connected to the driver on the secondary side: 1-m blue cable with RJ45 plug

Technical data

GENERAL

Device category	Control gear
Conformity	CE, EAC, RoHS, WEEE
Test symbol	ENEC 05

ATTACHMENT

Installation type	Recessed mounting
Installation position	Ceiling
Type of connection	Push terminal, Plug
Connector	RJ45
Connectable wire cross section	0.75 – 2.5 mm ²
Number of contacts	3
Length of cable	1 m

HOUSING

Dimensions	Length 132 mm x Width 45 mm x Height/ Depth 30 mm
------------	--

Weight	237 g
Material	PC + ABS
Protection type	IP20
Permissible ambient temperature	0 °C...+40 °C
Relative humidity	10 – 90%, non-condensing
Colour	black/white


ELECTRICAL VERSION

Control system	ON/OFF
Protection class	II
Nominal voltage	200 – 240 V ~ / 50 – 60 Hz
Output voltage	28 – 42 V DC
In-rush current	12.5 A / 232 μs
Output current	700 mA
Power consumption	30 W
Power consumption	300 mA
Stand-by consumption	< 0.5 W

DRIVER-SET 30W RJ45

Item number **GTIN**
EQ10127786 4015120127786

Dimension drawing

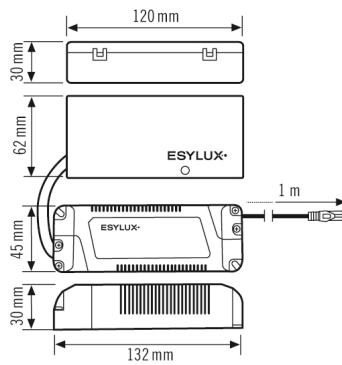

Detailed product description

- ON/OFF LED driver set for ESYLUX satellite LED lights with constant light colour
- Max. power output 30 W
- Current output 700 mA
- Connected to the driver on the primary side: 150-mm white cable with a 3-pin push terminal, 2.5 mm³, in a junction box with cord grips
- Connected to the driver on the secondary side: 1-m blue cable with RJ45 plug