


DRIVER-SET 30W 700mA RJ45 WAGO WINSTA DALI-2

Item number **GTIN**
EQ10127809 4015120127809

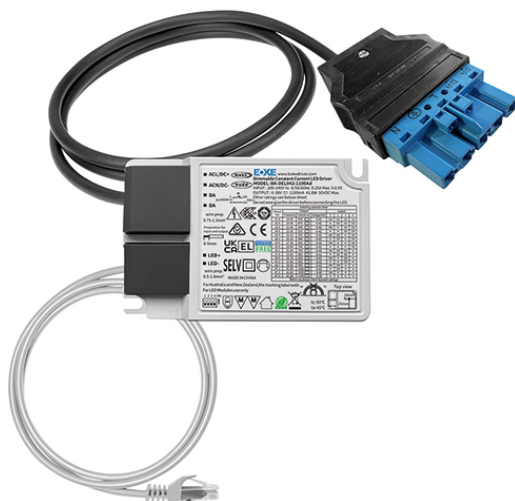

Product description

- DALI-2 plug-and-play LED driver set for ESYLUX satellite LED luminaires with constant light colour
- Current output 700 mA
- Primary side on driver: 0.5 m black cable with WAGO WINSTA 770 5-pin plug
- Secondary side connected to driver: 0.5 m white cable with RJ45 plug

Technical data

GENERAL

Device category	Control gear
Product information	Meets DALI-2 standard
User interface	DALI-Bus
Conformity	CE, EAC, RoHS, WEEE
Test symbol	ENEC 05
Product-specific information	Meets DALI-2 standard

ATTACHMENT

Installation type	Recessed mounting
Installation position	Ceiling
Type of connection	Plug
Connector	WAGO WINSTA® 770, RJ45
Connectable wire cross section	0.75 – 2.5 mm ²
Number of contacts	5
Length of cable	0.5 m

HOUSING

Dimensions	Length 103 mm x Width 68 mm x Height/ Depth 31 mm
------------	--

Weight	230 g
Material	PC + ABS
Protection type	IP20
Permissible ambient temperature	-20 °C...+45 °C
Relative humidity	5-85%, non-condensing, non-condensing
Colour	white


ELECTRICAL VERSION

Control system	DALI-2
Protection class	II
Nominal voltage	200 – 240 V AC/DC / 50 – 60 Hz
Output voltage	6 – 42 V DC
In-rush current	7.9 A / 304 µs
Output current	700 mA
Power consumption	33 W
Power consumption	250 mA
Stand-by consumption	< 0.5 W

DRIVER-SET 30W 700mA RJ45 WAGO WINSTA DALI-2

Item number	GTIN
EQ10127809	4015120127809

Dimension drawing

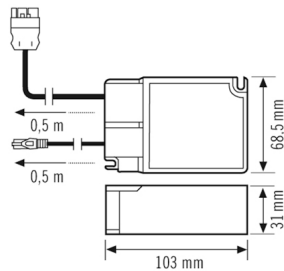

Detailed product description

- DALI-2 plug-and-play LED driver set for ESYLUX satellite LED luminaires with constant light colour
- Current output 700 mA
- Primary side on driver: 0.5 m black cable with WAGO WINSTA 770 5-pin black/blue plug
- Secondary side connected to driver: 0.5 m white cable with RJ45 plug