

DRIVER-SET TW 32W 700mA RJ45 WAGO WINSTA DALI-2 DT8

Item number **GTIN**
EQ10127830 4015120127830



Product description

- DALI-2 DT8 plug-and-play LED driver set for tunable white ESYLUX satellite LED luminaires
- Current output 700 mA
- Primary side on driver: 0.5 m black cable with WAGO WINSTA 770 5-pin black/blue plug
- Secondary side on driver: 0.5 m blue cable (cold-white channel) and 0.5 m red cable (warm-white channel) with RJ45 plugs

Technical data

GENERAL

Device category	Control gear
Product information	Meets DALI-2 standard
User interface	DALI-Bus
Conformity	CE, EAC, RoHS, WEEE
Test symbol	ENEC 25
Product-specific information	Meets DALI-2 standard

ATTACHMENT

Installation type	Recessed mounting
Installation position	Ceiling
Type of connection	Plug
Connector	WAGO WINSTA® 770, RJ45
Connectable wire cross section	0.75 – 2.5 mm ²
Number of contacts	5
Length of cable	0.5 m

HOUSING

Dimensions	Length 117 mm x Width 46 mm x Height/ Depth 29 mm
------------	--

Weight	260 g
Material	PC + ABS
Protection type	IP20
Permissible ambient temperature	-20 °C...+50 °C
Relative humidity	5-85%, non-condensing, non-condensing
Colour	Black


ELECTRICAL VERSION

Control system	DALI-2
Protection class	II
Nominal voltage	200 – 240 V AC/DC / 50 – 60 Hz
Output voltage	12 – 46 V DC
In-rush current	3.7 A / 173 µs
Output current	700 mA
Power consumption	34 W
Power consumption	180 mA
Stand-by consumption	< 0.5 W

DRIVER-SET TW 32W 700mA RJ45 WAGO WINSTA DALI-2 DT8

Item number	GTIN
EQ10127830	4015120127830

Dimension drawing

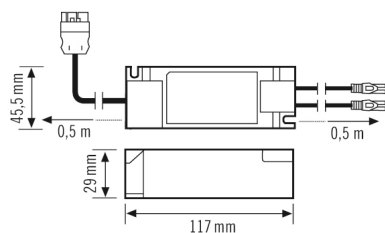

Detailed product description

- DALI-2 DT8 plug-and-play LED driver set for Tunable White ESYLUX satellite LED luminaires
- Current output 700 mA
- Primary side on driver: 0.5 m black cable with WAGO WINSTA 770 5-pin black/blue plug
- Secondary side on driver: 0.5 m blue cable (cold-white channel) and 0.5 m red cable (warm-white channel) with RJ45 plugs