


OL WL 100 OP 900 850 BK

Item number EL10710018
GTIN 4015120710018

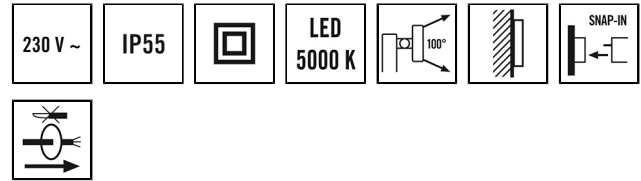

Product description

- LED light
- Design lamp made of die-cast aluminium and plastic
- Rated output P: 9.5 W, light colour approx. 5000 K white

Technical data


GENERAL	
Device category	Wall light
Remote controllable	–
Conformity	CE, EAC, RoHS, WEEE
Warranty	3 years
ATTACHMENT	
Installation type	Surface mounting
Installation position	Wall
Type of connection	Screwed terminal
Connectable wire cross section	1.50 – 2.50 mm ²
Number of contacts	3
HOUSING	
Dimensions	Length 205 mm x Width 104 mm x Height/Depth 143 mm
Weight	532 g
Material	Aluminium and UV-stabilised plastic
Protection type	IP55
Permissible ambient temperature	-25 °C...+50 °C
Colour	black, similar to RAL 9005
Glow wire test in accordance with IEC 60695-2-10	650 °C

ELECTRICAL VERSION	
Control system	ON/OFF
Protection class	II
Nominal voltage	230 – 230 V ~ / 50 – 50 Hz
In-rush current	4.7 A / 33 µs
Leakage current	0.01 mA
LIGHT	
Diffuser	opal
Light emission	direct
Beam angle	90 °
Flicker factor	<10 %
Rated output P	9.5 W
Luminous flux	900 lm
Luminous efficacy	94 lm/W
Colour temperature	5000 K
Colour rendering index Ra	> 80
Colour tolerance	2 SDCM
L70B10 lifetime at 25 °C	80000 h
Life time L70B50 at 25 °C	100000 h
Life time L80B10 at 25 °C	50000 h
Life time L80B50 at 25 °C	65000 h
Life time L90B10 at 25 °C	25000 h
Life time L90B50 at 25 °C	30000 h


OL WL 100 OP 900 850 BK

Item number **GTIN**
 EL10710018 4015120710018


Dimension drawing



Light distribution

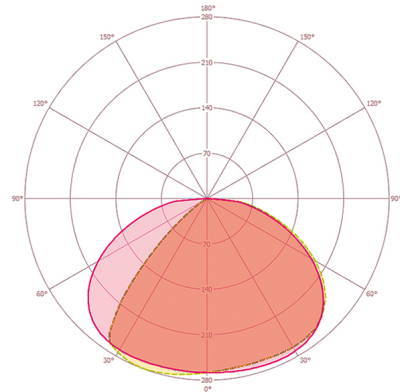


Circuit diagram



Standard operation with on/off switch.

Circuit diagram



Ansteuerung durch Automatikleuchten z. B. AOL 100 bzw. AOL 200

Detailed product description

- Design lamp made from die-cast aluminium
- Rated output P: 9.5 W, light colour 5000 K white
- One-hand plug-base installation
- Covered connector base with large wiring space
- Diaphragm line entrance for quick and easy installation
- Plug-in terminal for through-wiring of the protective conductor included