


## MD-C 360i/32 Corridor

**Item number**      **GTIN**  
 EP10428128      4015120428128

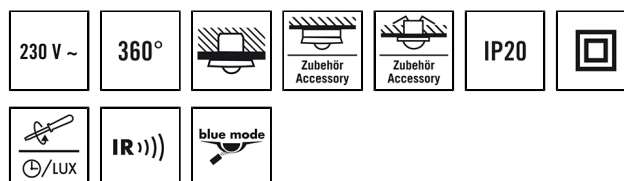

### Technical data

GENERAL	
Device category	Ceiling-mounted motion detector
Product information	Please note the Explanation of circuit breaker in the download area of the product!
Included in delivery	includes lens mask
User interface	Adjusting controller, IR remote control with "blue mode" technology
Remote controllable	✓
Conformity	CE, EAC, RoHS, WEEE
Warranty	5 years
ATTACHMENT	
Installation type	Flush mounting / device box Ø 68 mm
Installation position	Ceiling
Installation dimension	Installation depth: 24 mm, Ø 60 mm
Type of connection	Push terminal
Connectable wire cross section	1.50 – 2.50 mm <sup>2</sup>
HOUSING	
Dimensions	Height/Depth 70 mm, Ø 108 mm
Weight	144 g
Material	UV-stabilised polycarbonate
Protection type	IP20
Protection type with accessory	IP54 with surface-mounted box (order separately)
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 – 93 %, non-condensing
Colour	white, similar to RAL 9010

### Product description

- Motion detector with **360° field of detection** for ceiling mounting
- Large **Range of up to 32 m in corridors or passages** in diameter at a recommended installation height of 3 m (maximum mounting height 10 m), suitable for a variety of uses
- 16 A high-performance relay (tungsten pre-contact)
- Default settings ensure immediate operability

### Offers special product features like:

- Simple parameterisation, remote control and documentation with ESY-Pen and ESY-App

### ELECTRICAL VERSION

Control system	ON/OFF
Protection class	II
Nominal voltage	230 – 230 V ~ / 50 – 50 Hz
In-rush current	800 A / 200 µs
Power consumption	0.3 W
Stand-by consumption	< 0.3 W

### SENSORS

Detection angle	360°
Detection range diagonally	32 m elliptical
Detection range head-on	Ø 16 m
Field of detection	up to 628 m <sup>2</sup>
Recommended installation height	3 m
Max. mounting height	10 m
Light measurement	mixed light
Level of brightness	5 – 2000 lx

### CHANNELS (LIGHTING / HVAC)

Number of light channels	1
Push button input lighting	1
Push button input HVAC	–
Number of parallel switchable detectors	10
Slave input	–
Mode	Semi-automatic, Fully automatic
Constant light control	–
Channel	<b>C1</b> Lighting
Function	Switching
Switching capacity	230 V/50 Hz, 16 AX

## MD-C 360i/32 Corridor

<b>Item number</b>	<b>GTIN</b>
EP10428128	4015120428128

	2300 W/10 A (cos phi = 1) 1150 VA/5 A (cos phi = 0,5) 600 W LED
Switch contact	make contact / non-floating

Push button input	✓
Impulse mode	✓
Switch-off delay time	60 s...30 min (adjustable in steps)

### Factory settings

<b>GENERAL</b>	
Sensitivity	100 %
<b>CHANNELS (LIGHTING / HVAC)</b>	
Channel	C1 Lighting

Operating mode	fully automatic
Level of brightness/switching threshold	100 lx
Switch-off delay time	5 min

### Accessories

Product designation	Item number	Product description	GTIN
<b>Cover</b>			
COMPACT COVER SET 24/32 SR	EP10425431	Cover set for COMPACT series, 24 m/32 m, consists of cover and design ring, silver	4015120425431
COMPACT COVER SET 24/32 BK	EP00007491	Cover set for COMPACT series, 24 m/32 m, consists of cover and design ring, black	4015120007491
<b>Mounting</b>			
COMPACT MOUNTING BOX IP20 SM WH	EP10425370	Surface-mounted box for COMPACT series, IP20, white	4015120425370
COMPACT MOUNTING BOX IP20 SM SR	EP10425387	Surface-mounted box for COMPACT series, IP20, silver	4015120425387
COMPACT MOUNTING BOX IP54 SM WH	EP10425905	Surface-mounted box for COMPACT series, IP54, white	4015120425905
COMPACT MOUNTING BOX IP54 SM SR	EP10425912	Surface-mounted box for COMPACT series, IP54, silver	4015120425912
MOUNTING SET IP20 FM 62 WH	EP10425929	Recessed ceiling mounting set includes installation bracket and dust-protected box, 62 mm	4015120425929
COMPACT MOUNTING BOX IP54 SM BK	EP10426940	Surface-mounted box for COMPACT series, IP54, black	4015120426940
COMPACT MOUNTING BOX IP20 SM BK	EP10426933	Surface-mounted box for COMPACT series, IP20, black	4015120426933
<b>Protection</b>			
BASKET GUARD ROUND LARGE	EM10425608	Basket guard for presence and motion detectors and smoke detectors, Ø 180 mm, height 90 mm	4015120425608
<b>Remote control</b>			
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	4015120425356
REMOTE CONTROL MDi/PDi	EM10425509	IR remote control for presence detectors and motion detectors	4015120425509

## MD-C 360i/32 Corridor

**Item number**      **GTIN**  
 EP10428128      4015120428128

Dimension drawing	Field of detections	Detection range	
		<ul style="list-style-type: none"> <li>■ Diagonally (A)</li> </ul>	32 m elliptical
		<ul style="list-style-type: none"> <li>■ Frontal (B)</li> </ul>	Ø 16 m

Circuit diagram	Circuit diagram

Standard with optional control via a closing button and parallel wiring of max. ten devices.

Standardbetrieb mit Treppenlichtautomatschaltung und optionaler Ansteuerung durch Schließbaster.

### Detailed product description

- Motion detector with **360° field of detection** for ceiling mounting
- Large **Range of up to 32 m in corridors or passages** in diameter at a recommended installation height of 3 m, suitable for a variety of uses
- 16 A high-performance relay (tungsten pre-contact), ideal for switching capacitive loads such as electronic ballasts, parallel-compensated fluorescent lamps, compact fluorescent lamps, energy saving lamps
- Automatic lighting control for use without, or with very little, natural light
- Simple programming using remote control with "blue mode" technology or setting elements (potentiometer)
- Integrated toggle for setting with remote control or by adjusting controller - prevents operating errors and provides tamper protection
- Default settings ensure immediate operability
- Masking of interference sources by reducing sensitivity using DIP switches
- Push button input with toggle function "room = ON + OFF/hallway = ON"
- Flush-mounted device as standard
- Surface mounting or recessed ceiling mounting with accessories
- Large wiring space due to shallow installation depth of power box
- Quick and simple connection with plug-in terminals
- Extension of the field of detection with parallel connection of max. 8 detectors
- Targeted masking out of areas by means of an enclosed lens mask